Highlights

• Neat, picturesque, ultra–clear&ultra–thin, and lightweight saving transportation costs.

• Great Ventilation, Light up to 68% Transparency.

• Intelligent module with automatic data loading and self–cooling function.

• IP65 level front and rear waterproof, easily cope with rain and fog weather.

• Passed CE、FCO、EMC Certification Standards.

Why Spectrum LED ?

Shenzhen Spectrum Technology Co.,Ltd is a state–level high–tech enterprise. Spectrum provide service of creative LED display solutions with integrating designs, manufacturing and installation. Our products are strictly implemented the regulation in accordance with the ISO9001 certification system, certify international pass, domestic CE, ETL, CCC, UL, CUL, SASO certifications and other related quality certifications.

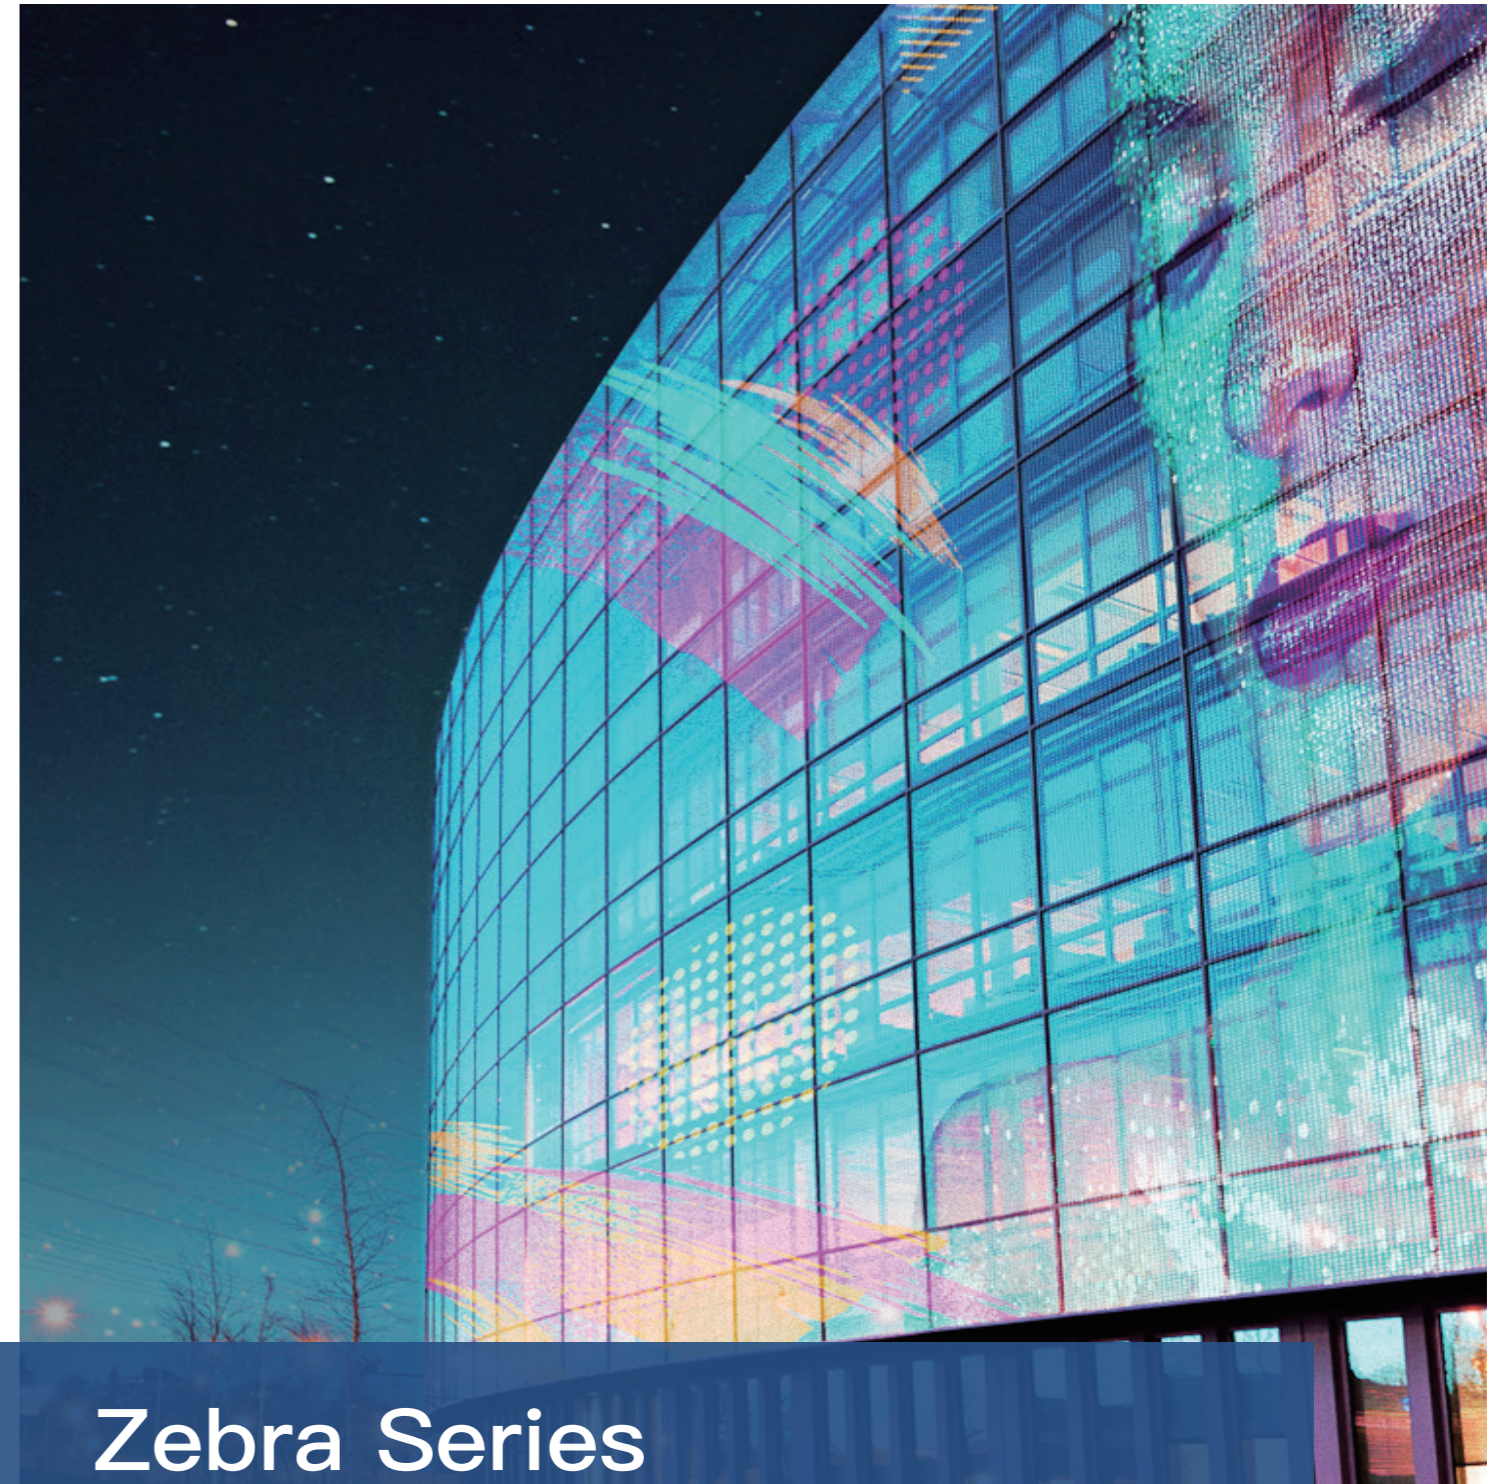@sz–spectrum   Shenzhen_spectrum   shenzhen_spectrum   shenzhen spectrum   shenzhen_spectrum

SPECTRUM

Zebra Series

Indoor Transparent | Outdoor Curtain

Spectrum announce the newest Zebra III Outdoor LED curtain display with light weight die–casting aluminum structure and high–transparency. Zebra III Outdoor LED curtain display contains colorful and vivid picture quality. Zebra series provide viewers with advertisement broadcasting, atmosphere generation, information transmission, brand promotion and interactive experience. Spectrum Zebra III Outdoor LED curtain display redefines customer experience and maximize the value of commercial advertising screen.
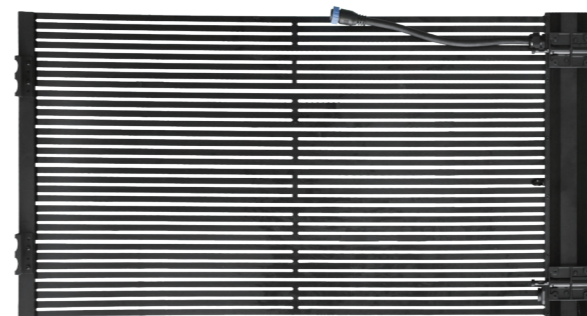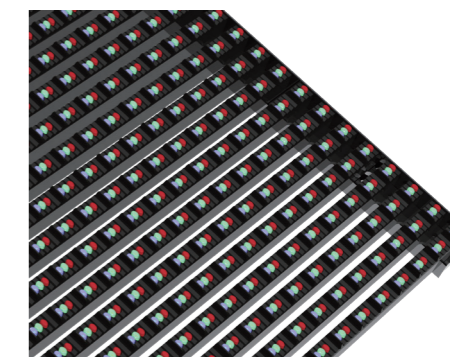
SPECTRUM

Specification

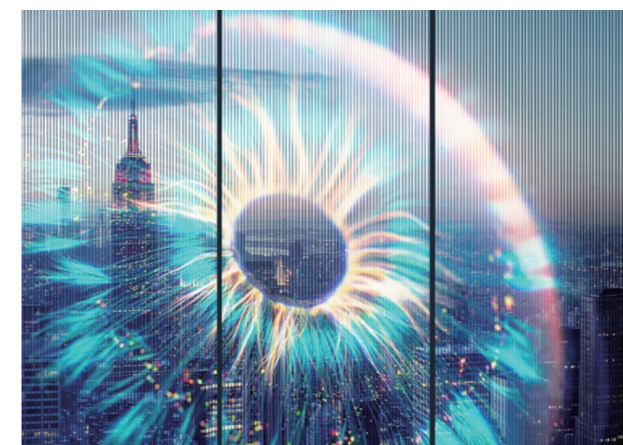|	P10.4	P16.66	P16–31
Pixel Pitch	10.4mm	16.66mm	(H)33.33mm (V)16.66mm
Cabinet Dimension	1000 x 500mm	500 x 1000mm / 1000 x 1000mm	
Configuration	SMD2727	DIP346	
Brightness	1000–6000 cd/㎡	≥8000 cd/㎡	
Pixel Density	9216 dot/㎡	3600 dot/㎡	1800 dot/㎡
Transparency	≥28%	≥57%	
Best Viewing Distance	≥10m	≥16m	≥16m
Weight	≤17kg/㎡	≤20kg/㎡	≤20kg/㎡
IP Grade	IP65		
Usage Environment	Outdoor		
View Angle	(H)140°/(V)140°	(H)120°/(V)120°	
Max.Power	600 W/㎡	600 W/㎡	400 W/㎡
Avg.Power	180 W/㎡	180 W/㎡	120 W/㎡
Scan Method	Static Scan		
Gray Scale	14 Bits		
Refresh Rate	3840 Hz		
Input Voltage	AC100 ~ 240V,50/60Hz		
Control Mode	Synchronized Control		
Operating Temperature	–20℃ ~ 60℃		
Humidity	10% ~ 95%		
Operating Life	≥100,000 Hours		
Cabinet Material	Aluminum		
Installation Method	Fixed		
Maintenance Mode	Front / Back		
Package	Wooden Box		

Features

Light–weight Cabinet and Easy Installation

65% lighter than traditional LED displays, the ultra–light weight Zebra series curtain display enable fast installation with simplified mounting structure

High Transparency

Ultra–high transparency integrates allows high visual–bility.

Superior Heat Dissipation

Hollow–curved cabinet made of aluminum alloy brings excellent heat dissipation for long–time stable

IP65

IP65 protection design, waterproof, dust–proof, salt–fog proof, performance to survive well in harsh environment .

| IP65 | Cooling System | Catwalk Space free | Anti-Reflection | Easy Installation | 24/7 | ISO 9001 | Fireproofing | Waterproof |